

N/020673  
17 jul



**PCT**

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : <b>H01J 61/02, 61/12</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 98/25294</b> (43) International Publication Date: 11 June 1998 (11.06.98)</p>
<p>(21) International Application Number: PCT/IB97/01313 (22) International Filing Date: 20 October 1997 (20.10.97) (30) Priority Data: 96203434.4 4 December 1996 (04.12.96) EP (34) Countries for which the regional or international application was filed: NL et al. (71) Applicant: PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (71) Applicant (for SE only): PHILIPS NORDEN AB [SE/SE]; Kottbygatan 7, Kista, S-164 85 Stockholm (SE). (72) Inventors: VAN VLIET, Johannes, Adrianus, Josephus, Maria; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). GEIJTENBEEK, Johannes, Jacobus, Franciscus; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). (74) Agent: DUSSELDORP, Jan, C.; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).</p>		<p>(81) Designated States: CN, HU, JP, KR, PL, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: METAL HALIDE LAMP

(57) Abstract

The invention relates to a metal halide lamp provided with a discharge vessel having a ceramic wall. The discharge vessel has two electrodes whose tips have an interspacing EA. The discharge vessel has an internal diameter Di over said distance EA. According to the invention, the discharge vessel has a filling which comprises NaI and CeJ<sub>3</sub> while at the same time the relation EA/Di > 5 is complied with.

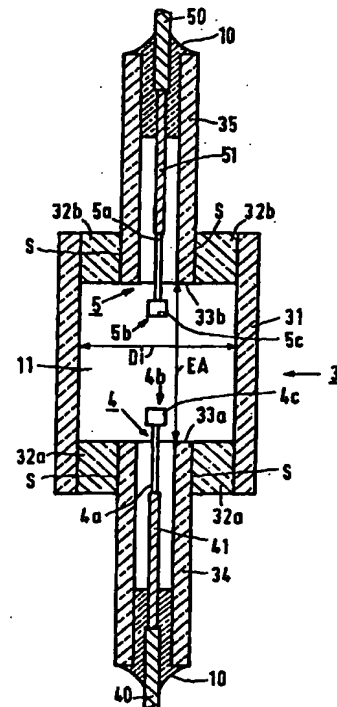

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Metal halide lamp.

The invention relates to a metal halide lamp provided with a discharge vessel with a ceramic wall which encloses a discharge space in which an ionizable filling is present, two electrodes having tips with a mutual distance EA being arranged in said discharge space, the latter having an internal diameter Di at least over the distance EA.

5 A lamp of the kind mentioned in the opening paragraph is known from EP-A-0 215 524 (PHN 11.485). The known lamp, in which a high luminous efficacy goes hand in hand with excellent color properties (inter alia a general color rendering index  $R_a \geq 80$  and a color temperature  $T_c$  of between 2600 and 4000 K), is highly suitable as a light source for inter alia interior lighting. This lamp construction is based on the recognition that  
10 a good color rendering is possible when sodium halide is used as a filling ingredient of a lamp and a strong widening and inversion of the Na emission in the Na-D lines takes place during lamp operation. This requires a high coldest-spot temperature  $T_{kp}$  in the discharge vessel of, for example, 1170 K (900 °C). Inversion and widening of the Na-D lines imply that they take the shape of an emission band in the spectrum with two maxima at a mutual  
15 distance of  $\Delta\lambda$ . The requirement that  $T_{kp}$  should have a high value excludes under practical conditions the use of quartz or quartz glass for the discharge vessel wall and renders the use of a ceramic material for the discharge vessel wall necessary.

The term "ceramic wall" in the present description and claims is understood to cover a wall of metal oxide such as, for example, sapphire or densely sintered  
20 polycrystalline  $Al_2O_3$  as well as metal nitride, for example AlN.

The known lamp combines a good color rendering with a comparatively wide range of the color temperature. The filling of the discharge vessel comprises at least Na halide and Tl halide. In addition, the discharge vessel preferably contains at least one element from the group formed by Sc, La, and the lanthanides Dy, Tm, Ho, and Er. The  
25 known lamp has a comparatively short discharge vessel for which it is true that  $0.9 \leq EA/Di \leq 2.2$ , and a high wall load which is more than 50 W/cm<sup>2</sup> for practical lamps. The wall load is defined here as the quotient of the lamp power and the outer surface of that portion of the discharge vessel wall which is situated between the electrode tips.

It is a disadvantage of the known lamp that it has a comparatively limited

luminous efficacy for general lighting purposes.

US-A-4,972,120 discloses a lamp which radiates white light with reasonable color properties ( $3000\text{ K} \leq T_c \leq 4000\text{ K}$ ;  $R_a$  approximately 50-60) and which has a comparatively high luminous efficacy. This lamp, however, requires a solenoidal electric field for energizing the discharge, for which purpose the lamp is provided with an external coil which is wound largely around the discharge vessel. The coil is to be operated at a very high frequency of more than 1 MHz. Although the light radiated by the lamp is in itself quite useful for general lighting purposes, the exceptional construction of the lamp and the specific electric supply equipment required for it render the use of this lamp for general lighting purposes not very practical.

US-A-3,786,297 describes discharge lamps having very high luminous efficacies and provided with electrodes. The filling of the discharge vessel for this purpose comprises at least Cs halide and a comparatively large quantity of Hg (between approximately  $3\text{ mg/cm}^3$  and  $20\text{ mg/cm}^3$ ) which has a pressure of more than 3 at during lamp operation. Although Cs has a low ionization voltage, radiation from Cs lies for a considerable portion outside the visible part of the spectrum. It was found that the light radiated by the lamp has color properties such that it is less suitable for use in general lighting. The use of a large dose of Hg is undesirable for environmental reasons.

An important disadvantage of the metal halide lamps fitted with electrodes and having a high luminous efficacy is the major risk of spiraling instabilities occurring in the discharge, and of additive segregation in the filling of the discharge vessel.

The invention has for its object to provide a measure for obtaining a metal halide lamp with a high luminescent efficacy which is suitable for general lighting purposes.

According to the invention, a lamp of the kind mentioned in the opening paragraph is for this purpose characterized in that the ionizable filling comprises NaI and  $\text{CeJ}_3$ , and in that the relation  $\text{EA/Di} > 5$  is complied with.

The lamp according to the invention has the advantage that a high luminous efficacy can be realized in combination with good color properties ( $R_a \geq 40$ , color temperature  $T_c$ :  $2800 \leq T_c \leq 6000\text{ K}$ ), which render the lamp very suitable for use as a general lighting source. The discharge arc is hemmed in by the wall of the discharge vessel owing to the comparatively small diameter in relation to the electrode spacing, and thus to the discharge arc length, whereby it is achieved that the discharge arc is straight. It is surprisingly found that the wall of the discharge vessel is subject to a heating which is so homogeneous that the risk of fracture of the discharge vessel wall owing to thermal stresses

is very small. The occurrence of spiraling instabilities and segregation is also found to be strongly counteracted thereby.

The fact that the discharge arc is hemmed in means that the good heat conductivity of the ceramic material of the discharge vessel wall is advantageously used as a means for reducing thermal stresses in the discharge vessel wall. This is furthermore favorably affected by a choice of preferably at most  $30 \text{ W/cm}^2$  for the wall load.

A further improvement in controlling the wall temperature and thermal stresses in the discharge vessel wall can be achieved through a suitable choice of the wall thickness. The good heat conduction properties of the ceramic wall are utilized to further advantage when the ceramic wall has a thickness of at least 1 mm. An increase in the wall thickness here results not only in an increase in the heat radiation by the discharge vessel wall, but it promotes most of all a better heat transport from the portion of the wall lying between the electrodes to the comparatively cool ends of the discharge vessel. It is achieved thereby that the temperature difference occurring over the wall of the discharge vessel remains limited to 200-250 K. An increase in the wall thickness also leads to a reduction of the wall load.

An increase in the ratio  $EA/D_i$  through an increase in  $EA$  also provides a reduction of the wall load. Increasing radiation losses at the discharge vessel wall will occur then, however, and accordingly increasing heat losses of the discharge vessel during lamp operation. This will lead to a drop in  $T_{kp}$ , all other circumstances remaining the same.

It is necessary for obtaining a high luminous efficacy and good color properties that sufficiently high concentrations of Na and Ce should be present, which manifests itself inter alia in the value of  $\Delta\lambda$ . The value of  $\Delta\lambda$  is connected inter alia with the molar ratio  $\text{NaJ}:\text{CeJ}_3$  and the level of  $T_{kp}$ . It was found to be sufficient for the lamp according to the invention when  $\Delta\lambda$  has a comparatively low value, preferably in the range from 2 nm to 6 nm. It was experimentally found that a desired value of  $\Delta\lambda$  can already be realized given a level of  $T_{kp}$  of 1100 K. The value of 1100 K is accordingly the minimum value which  $T_{kp}$  is required to assume during lamp operation. Preferably, 1200 K or more is realized for  $T_{kp}$ .

An advantage of the above range of  $\Delta\lambda$  is that a limited range for  $T_{kp}$  can suffice. There is accordingly no necessity of using very high  $T_{kp}$  values, which is favorable for achieving a long lamp life. It should obviously be ensured in all cases that  $T_{kp}$  is lower than the maximum temperature which the ceramic wall material is capable of withstanding for longer periods.

Further experiments have shown that it is desirable to adopt 1500 K as a maximum value for  $T_{kp}$ . The temperatures and pressures prevailing in the discharge vessel with  $T_{kp} > 1500$  K become such that chemical corrosion processes of the discharge vessel wall give rise to unacceptable reductions in lamp life. Preferably,  $T_{kp}$  is at most 1400 K when densely sintered  $Al_2O_3$  is used for the discharge vessel wall.

According to the invention, the molar ratio  $NaI:CeJ_3$  lies between 3 and 25. It is found for a ratio below 3 that on the one hand the luminous efficacy becomes unacceptably low, and on the other hand the light radiated by the lamp contains an excessive amount of green. A color correction of the light, for example through the addition of salts to the ionizable filling of the discharge vessel, is possible only to the detriment of the luminous efficacy then. With a ratio higher than 25, the influence of the Ce on the color properties of the lamp is so small that these color properties show a strong resemblance to those of the known high-pressure sodium lamps.

If a lamp is to be suitable for general lighting purposes, a luminous efficacy is in fact required comparable to what is usual for this application in widely used high-pressure sodium lamps. The luminous efficacy of these high-pressure sodium lamps generally lies in the range from 100 lm/W to 130 lm/W. It is a disadvantage of these existing high-pressure sodium lamps that the radiated light is yellow instead of white and that the value of the general color rendering index  $R_a$  is approximately 20. An acceptable  $R_a$  value, however, is at least 40 for general lighting. Preferably, the  $R_a$  value is at least 45, and it is particularly favorable when the value lies in the range from 50 to 70. It is noted for comparison that high-pressure mercury and metal halide lamps used in practice for general lighting have luminous efficacies of approximately 50 lm/W and up to a maximum of 90 lm/W, respectively, and  $R_a$  values which lie between 50 and 90.

A rare gas is usually added to the ionizable filling of the discharge vessel for lamp ignition. It is possible to influence the photometric properties of the lamp through the choice of the filling pressure of the rare gas. In addition, a metal may be added, for example Hg, for realizing a desired lamp voltage. Zn is also suitable for this. Zn is also suitable for realizing a comparatively high  $T_c$  value. The Zn may be added in the form of a metal. It is alternatively possible for the Zn to be added in the form of a salt, for example  $ZnJ_2$ , to the filling.

The above and further aspects of the lamp according to the invention will be explained in more detail with reference to a drawing (not true to scale).

In the drawing:

Fig. 1 diagrammatically shows a lamp according to the invention, and Fig. 2 shows the discharge vessel of the lamp of Fig. 1 in detail.

Fig. 1 shows a metal halide lamp provided with a discharge vessel 3 having a ceramic wall which encloses a discharge space 11 containing an ionizable filling.

5 Two electrodes whose tips are at a mutual distance EA are arranged in the discharge space, and the discharge vessel has an internal diameter Di at least over the distance EA. The discharge vessel is closed at one side by means of a ceramic projecting plug 34, 35 which encloses a current lead-through conductor (Fig. 2: 40, 41, 50, 51) to an electrode 4, 5 positioned in the discharge vessel with a narrow intervening space and is connected to this

10 conductor in a gastight manner by means of a melting-ceramic joint (Fig. 2: 10) at an end remote from the discharge space. The discharge vessel is surrounded by an outer bulb 1 which is provided with a lamp cap 2 at one end. A discharge will extend between the electrodes 4, 5 when the lamp is operating. The electrode 4 is connected to a first electrical contact forming part of the lamp cap 2 via a current conductor 8. The electrode 5 is

15 connected to a second electrical contact forming part of the lamp cap 2 via a current conductor 9. The discharge vessel, shown in more detail in Fig. 2 (not true to scale), has a ceramic wall and is formed from a cylindrical part with an internal diameter Di which is bounded at either end by a respective end wall portion 32a, 32b, each end wall portion 32a, 32b forming an end surface 33a, 33b of the discharge space. The end wall portions each

20 have an opening in which a ceramic projecting plug 34, 35 is fastened in a gastight manner in the end wall portion 32a, 32b by means of a sintered joint S. The ceramic projecting plugs 34, 35 each narrowly enclose a current lead-through conductor 40, 41, 50, 51 of a relevant electrode 4, 5 having a tip 4b, 5b. The current lead-through conductor is connected to the ceramic projecting plug 34, 35 in a gastight manner by means of a melting-ceramic joint 10

25 at the side remote from the discharge space.

The electrode tips 4b, 5b are arranged at a mutual distance EA. The current lead-through conductors each comprise a halide-resistant portion 41, 51, for example in the form of a Mo-Al<sub>2</sub>O<sub>3</sub> cermet and a portion 40, 50 which is fastened to a respective end plug 34, 35 in a gastight manner by means of the melting-ceramic joint 10. The melting-

30 ceramic joint extends over some distance, for example approximately 1 mm, over the Mo cermet 40, 41. It is possible for the parts 41, 51 to be formed in an alternative manner instead of from a Mo-Al<sub>2</sub>O<sub>3</sub> cermet. Other possible constructions are known, for example, from EP-0 587 238 (US-A-5,424,609). A particularly suitable construction was found to be a halide-resistant coil applied around a pin of the same material. Mo is very suitable for use as

a highly halide-resistant material. The parts 40, 50 are made from a metal whose coefficient of expansion corresponds very well to that of the end plugs. Nb, for example, is for this purpose a highly suitable material. The parts 40, 50 are connected to the current conductors 8, 9 in a manner not shown in any detail. The lead-through construction described renders it possible to operate the lamp in any burning position as desired.

Each of the electrodes 4, 5 comprises an electrode rod 4a, 5a which is provided with a coiling 4c, 5c near the tip 4b, 5b. The projecting ceramic plugs are fastened in the end wall portions 32a and 32b in a gastight manner by means of a sintered joint S. The electrode tips then lie between the end surfaces 33a, 33b formed by the end wall portions. In an alternative embodiment of a lamp according to the invention, the projecting ceramic plugs 34, 35 are recessed behind the end wall portions 32a, 32b. In that case the electrode tips lie substantially in the end surfaces 33a, 33b defined by the end wall portions.

In a practical realization of a lamp according to the invention as shown in the drawing, the rated lamp power is 150 W. The lamp, which is suitable for being operated in an existing installation for operating a high-pressure sodium lamp (retrofit lamp) has a lamp voltage of 91 V. The ionizable filling of the discharge vessel comprises 0.7 mg Hg ( $< 1.6 \text{ mg/cm}^3$ ) and 8 mg iodide salts of Na and Ce in a molar ratio of 7:1. The Hg serves to ensure that the lamp voltage will be between 80 V and 100 V, which is necessary for the retrofit requirement. In addition, the filling comprises Xe with a filling pressure of 250 mbar as an ignition gas.

The electrode tip interspacing EA is 32 mm, the internal diameter Di 4 mm, so that the ratio  $EA/Di = 8$ . The wall thickness of the discharge vessel is 1.4 mm. The lamp accordingly has a wall load of  $21.9 \text{ W/cm}^2$ .

The lamp has a luminous efficacy of 130 lm/W in the operational state, which has dropped to 126 lm/W after an operational life of 2000 hours. The light radiated by the lamp has values for  $R_a$  and  $T_c$  of 58 and 3900 K, respectively. The light radiated by the lamp has a color point (x,y) with values (.395, .416), which lies outside the blackbody line by less than (.05, .05). The blackbody line is formed by the set of color points of a black or Planckian radiator. Light having a color point which deviates as little as above from the blackbody line is regarded as white light for general lighting purposes. The coldest-spot temperature  $T_{kp}$  is 1200 K here and the value of  $\Delta\lambda$  is 3.3 nm. 250 mbar Ar was used as the rare gas in a comparable lamp. This resulted in a lamp with comparable photometric properties.

It is noted for comparison that a high-pressure sodium lamp (make Philips, type SON PLUS)



of the same power rating has a luminous efficacy of 110 lm/W and radiates yellow light with  $T_c = 2000$  K and  $R_a = 21$ . A high-pressure mercury discharge lamp (make Philips, type HPL Comfort) does radiate light with color properties comparable to those of the lamp according to the invention, but here the luminous efficacy is no more than 50 to 60 lm/W.

- 5 In a modification, the only change was that the molar ratio between the NaJ and  $CeJ_3$  was changed to 25:1, which resulted in a luminous efficacy of 124 lm/W at a lamp voltage of 80 V, a color temperature of 2820 K and a color rendering index of 41.  $T_{kp}$  is 1200 K under these conditions, and the value of  $\Delta\lambda$  is 4 nm. The color point coordinates are (0.459;0.423) the photometric properties of the light radiated by this lamp are only just acceptable for  
10 general lighting purposes.

- In an alternative realization, the lamp is free from Hg. The lamp has an electrode spacing EA of 32 mm and an internal diameter Di of 4 mm. The filling of the discharge vessel comprises 8 mg NaJ/ $CeJ_3$  in a molar ratio 7:1 and Xe. The wall load is 21.9 W/cm<sup>2</sup>. In a first embodiment with an Xe filling pressure of 1250 mbar, the power  
15 consumed by the lamp is 150 W and the lamp voltage is 47 V for a  $T_{kp}$  of 1220 K.  $\Delta\lambda$  is 4.1 nm in this embodiment of the lamp, the luminous efficacy is 150 lm/W, the color temperature  $T_c$  3300 K, and the general color rendering index  $R_a$  is 49. The color point coordinates (x;y) are (0.436;0.446). In a second embodiment of this lamp, the Xe filling pressure is 500 mbar. The lamp voltage in this second embodiment is 45 V,  $\Delta\lambda$  is 3.8 nm,  
20 the luminous efficacy is 145 lm/W,  $T_c$  is 3600 K,  $R_a$  is 53, and (x;y) is (0.421;0.447).

- In a further modification of the same geometry and with 1250 mbar Xe, the molar ratio NaJ: $CeJ_3$  was changed to 5:1. The lamp is operated with a power of 185 W. Under these conditions the  $T_{kp}$  value is 1240 K for a  $\Delta\lambda$  of 4.5 nm, and the lamp voltage is 53 V, the luminous efficacy is 177 lm/W,  $T_c$  is 4232 K,  $R_a$  is 61, and (x;y) is (0.394;0.457).  
25 The wall load in this case is 27.1 W/cm<sup>2</sup>. The mercury-free lamps described are operated by means of a square-wave voltage generated by an electronic ballast circuit.

- Lamps according to the invention with a modified geometry were manufactured with a power rating of 150 W, an electrode spacing of 66 mm, an internal diameter of 2.6 mm, and a Xe filling pressure of 1250 mbar. In a first embodiment thereof,  
30 the filling comprises 8 mg NaJ and  $CeJ_3$  in a molar ratio of 7:1. This lamp has a lamp voltage of 119 V and a luminous efficacy of 125 lm/W.  $T_{kp}$  is 1250 K and  $\Delta\lambda$  is 3.1 nm. The values of  $T_c$ ,  $R_a$  and (x;y) are 3480 K, 45, and (0.426;0.445), respectively.

In a second embodiment, the molar ratio of the Na salt to the Ce salt is 3.1. The lamp voltage of the second embodiment is 130 V under these conditions, the

luminous efficacy is 130 lm/W,  $T_c$  is 4312 K,  $R_a$  is 61, and (x;y) is (0.383;0.441) for a  $T_{kp}$  of 1460 K. The value of  $\Delta\lambda$  is 2.4 nm. These two embodiments were also operated with a square-wave voltage.

In another experiment, four lamps with a power rating of 150 W and with  
5 Zn as an additive were manufactured. All lamps contain NaI and  $CeJ_3$  in a molar ratio of 7:1. The wall thickness of the discharge vessel is 1.4 mm in all cases. In the first lamp, the internal diameter is 2.6 mm and the electrode spacing 32 mm. The Zn is added in the form of 0.4 mg  $ZnJ_2$ . The lamp voltage of this lamp is 95 V, the luminous efficacy is 134 lm/W,  $T_c$  is 4400 K,  $R_a$  is 63, and the color point coordinates (x;y) are (0.378;0.429).  $T_{kp}$  was  
10 found to be 1370 K and  $\Delta\lambda$  3.9 nm.

In the second lamp, the electrode spacing was increased to 42 mm and the quantity of Zn salt was reduced to 0.2 mg. At an arc voltage of 110 V,  $T_{kp}$  is 1350 K,  $\Delta\lambda$  is 3.7 nm, the luminous efficacy is 138 lm/W, the  $T_c$  is 4600 K,  $R_a$  is 64, and the color point coordinates (x;y) are (0.368;0.436).

15 Compared with the first lamp, the internal diameter of the discharge vessel of the third lamp was increased to 40 mm. The Zn was added in metal form in this case in a quantity of 4 mg. This led to a reduction in  $T_{kp}$  to 1250 K for a  $\Delta\lambda$  of 3.3 nm. The lamp has a lamp voltage of 85 V. The luminous efficacy is 115 lm/W for a  $T_c$  value of 4000 K, an  $R_a$  value of 62, and color point coordinates (x;y) of (0.395;0.427).

20 In the fourth lamp, 2 mg metallic Zn is added in a discharge vessel which has an internal diameter increased to 40 mm compared with the second lamp. This results in a further drop of  $T_{kp}$  to 1230 K and a  $\Delta\lambda$  of 3.2 nm. The lamp voltage is 89 V here, the luminous efficacy 111 lm/W, and the color temperature 3900 K. The  $R_a$  value is found to be 59, and the color point coordinates (x;y) are (0.402;0.432).

CLAIMS:

1. A metal halide lamp provided with a discharge vessel with a ceramic wall which encloses a discharge space in which an ionizable filling is present, two electrodes having tips with a mutual distance EA being arranged in said discharge space, the latter having an internal diameter Di at least over the distance EA, characterized in that the ionizable filling comprises NaJ and CeJ<sub>3</sub>, and in that the relation  $EA/Di > 5$  is complied with.
2. A lamp as claimed in Claim 1, characterized in that the discharge vessel of the lamp has a wall load value of  $\leq 30 \text{ W/cm}^2$ .
3. A lamp as claimed in Claim 1 or 2, characterized in that the wall of the ceramic discharge vessel has a thickness of at least 1 mm at least over the distance EA.
4. A lamp as claimed in Claim 1, 2 or 3, characterized in that the NaJ and the CeJ are present in a molar ratio which lies in a range from 3 to 25.
5. A lamp as claimed in Claim 1, 2, 3 or 4, characterized in that the NaJ and the CeJ are present in excess quantity, and in that a coldest-spot temperature  $T_{kp}$  of at least 1100 K and at most 1500 K prevails at the area of said excess quantity in the operational state of the lamp.

1/1

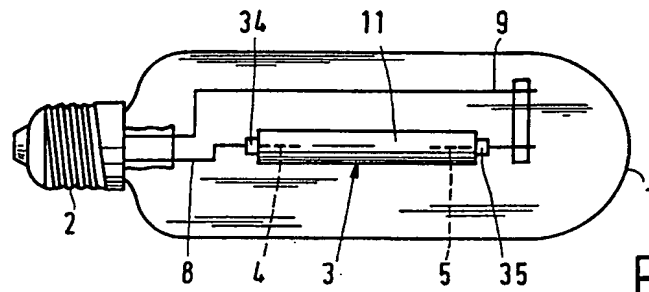


FIG. 1

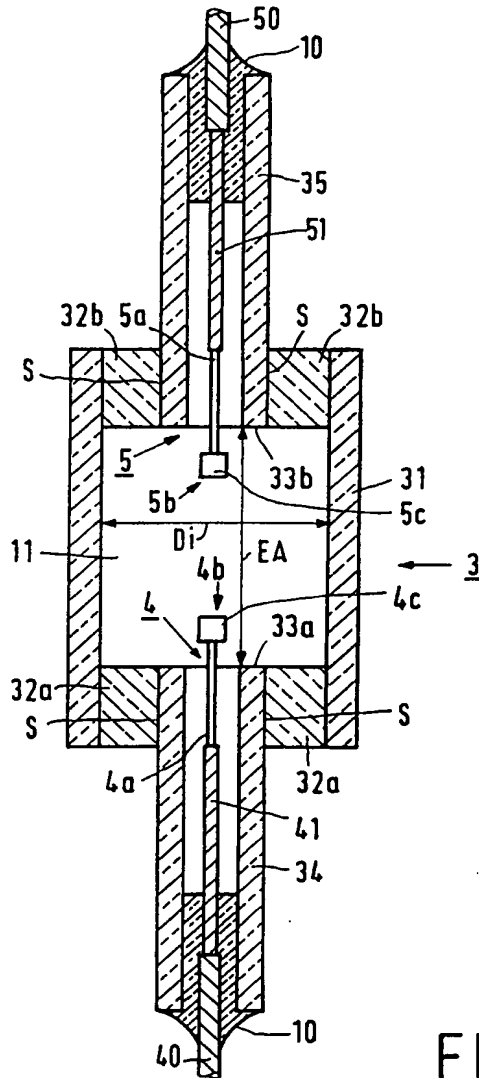


FIG. 2

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 97/01313

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>		
IPC6: H01J 61/02, H01J 61/12 According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols)		
IPC6: H01J		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
WPI		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0443675 A1 (N.V. PHILIPS' GLOEILAMPENFABRIEKEN), 28 August 1991 (28.08.91), page 2, line 19 - line 22 --	1-5
Y	GB 2132011 A (NV PHILIPS' GLOEILAMPENFABRIEKEN), 27 June 1984 (27.06.84), page 1, line 21 - line 30 --	1-5
Y	Patent Abstracts of Japan, abstract of JP 56-91368 A (TOKYO SHIBAURA ELECTRIC CO), 24 July 1981 (24.07.81), see the abstract --	1-5
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
27 April 1998		28 -04- 1998
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer  Gordana Ninkovic Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 97/01313

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0645799 A1 (GENERAL ELECTRIC COMPANY), 29 March 1995 (29.03.95), column 2, line 8 - line 15 --	1-5
A	Patent Abstracts of Japan, abstract of JP 56-86450 A (TOKYO SHIBAURA ELECTRIC CO), 14 July 1981 (14.07.81), see the abstract --	1-5
A	US 4983889 A (VICTOR D. ROBERTS), 8 January 1991 (08.01.91), abstract -- -----	1-5

# INTERNATIONAL SEARCH REPORT

Information on patent family members

02/04/98

International application No.

PCT/IB 97/01313

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0443675 A1	28/08/91	CN 1054333 A DE 69110314 D,T ES 2075929 T JP 4218252 A US 5153482 A	04/09/91 08/02/96 16/10/95 07/08/92 06/10/92
GB 2132011 A	27/06/84	BE 898336 A CA 1201756 A DE 3341846 A,C FR 2537340 A,B JP 1995078 C JP 6030239 B JP 59111244 A NL 184550 B,C NL 8204653 A US 4594529 A	29/05/84 11/03/86 07/06/84 08/06/84 22/11/95 20/04/94 27/06/84 16/03/89 02/07/84 10/06/86
EP 0645799 A1	29/03/95	CA 2130424 A JP 7153371 A	24/03/95 16/06/95
US 4983889 A	08/01/91	DE 69016097 D,T EP 0399288 A,B JP 1848977 C JP 3049147 A	17/08/95 28/11/90 07/06/94 01/03/91